


**Touch Panel HMI (Human-Machine Interface) Display Standard Content**  
 (for CT Scanner / Cath Lab / EP Lab / X-Ray / CT – Angio / Procedure Room)

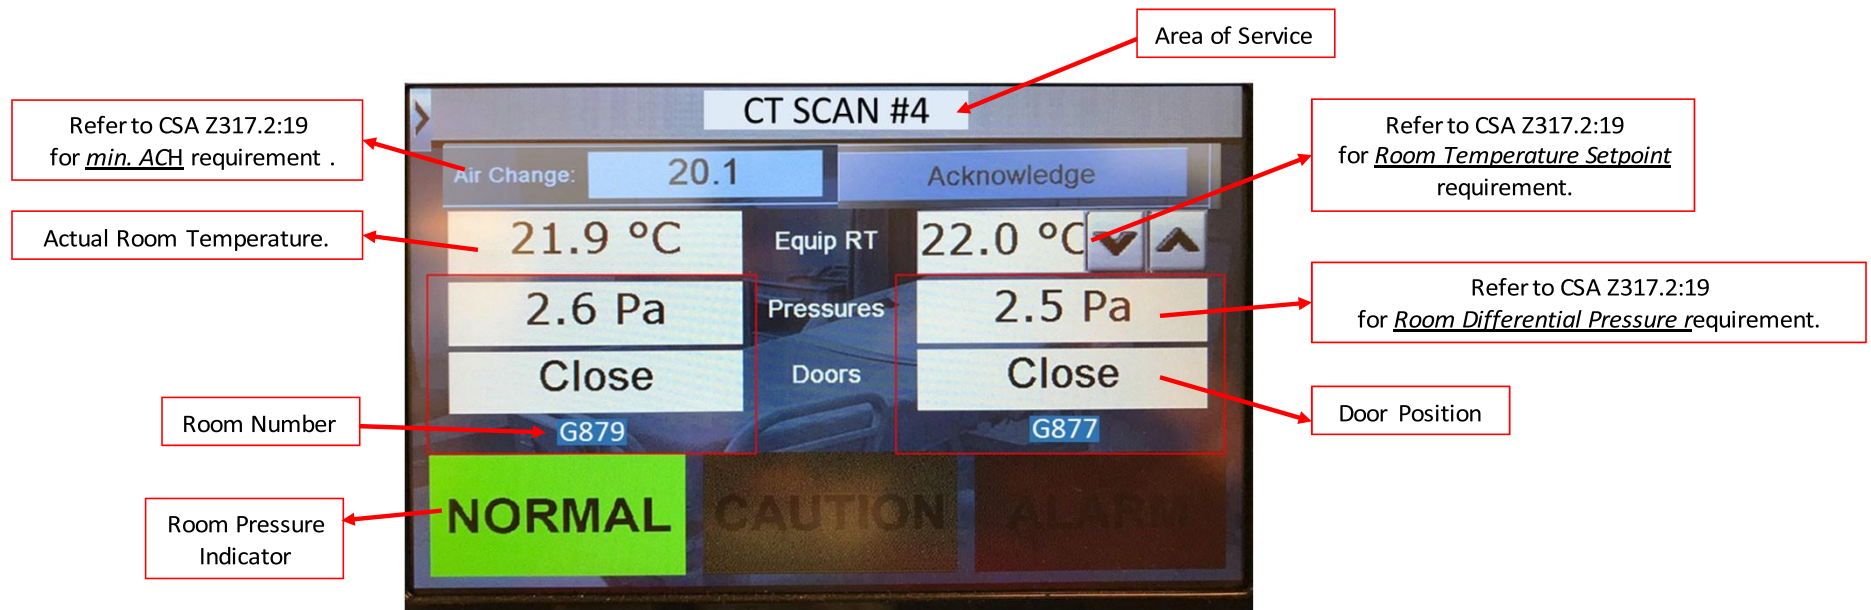

- Note:**
1. This Touch Panel HMI (Human-Machine Interface) should be controlling the VAV's to meet the setpoint of *Room Differential Pressure*.
  2. All above points need to connect to DDC based BMS.
  3. Use the "VGH Generic Controlled Pressure Room and Air Changes per Hour Test Sheet 05.02.2020 Rev. 0" for functional verification, submit to FMO-HVAC prior Demonstration Training and include to final commissioning report.
  4. Install HMI to the main entrance door (area of service).